



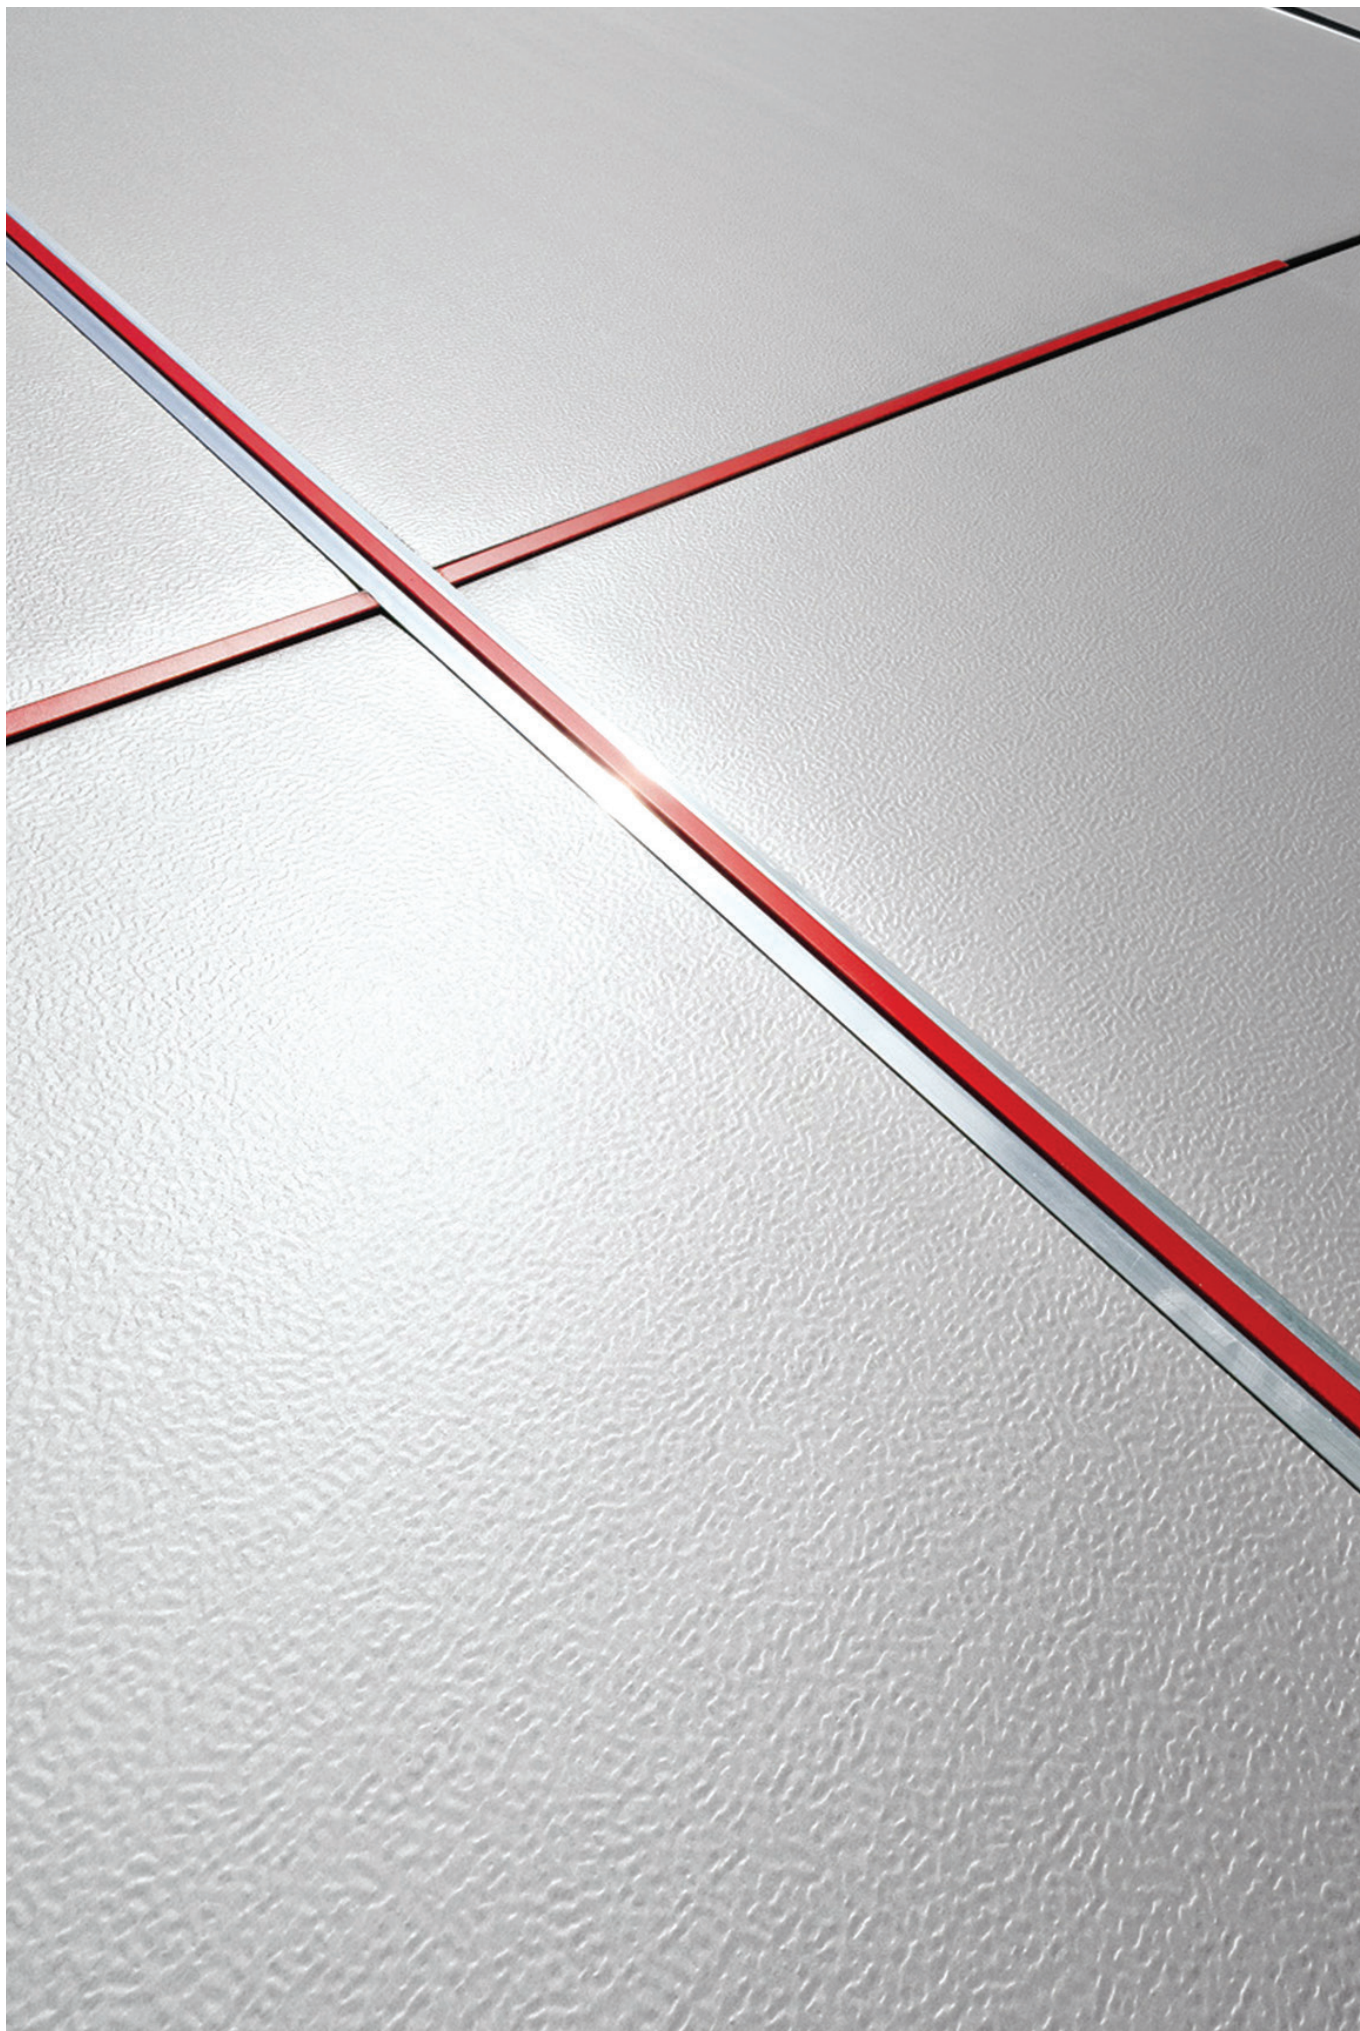

Top Hat

Fully supported sections designed to support and join wall cladding systems built with ThermaBarr, ThermaGard and ThermaMagma WAL insulated panels

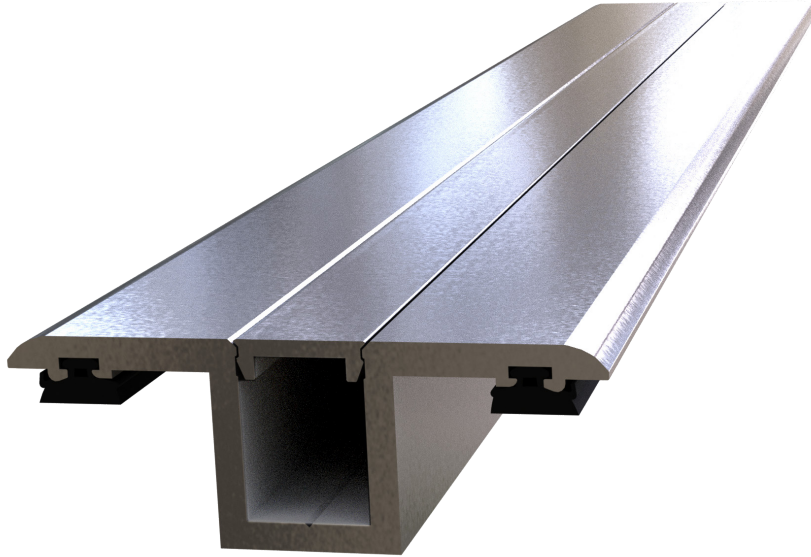

Available in

Coverage width 72mm | Maximum depth 21,5mm | Length 6000mm

Configuration

Suitable for external and internal coverage of vertical and horizontal panel joints

Installation

Installed at the joint between panels, at a distance from the supporting frame, after the panel installation is completed. In practice, self-drilling screws of suitable length may be used

